

Hybrid HD-SDI / Analog - Weatherproof Bullet (2.8~10mm) Varifocal Lens IR Camera w/ True WDR



Features

- Hybrid HD-SDI / 1000 TVL Analog
- 1/3" 2.1 Megapixel (1080p) CMOS Sensor
- 2.8~10mm Varifocal Lens
- Full HD 1920x1080p @ HD-SDI Mode
- 1000 TVL (960H) @ Analog Mode
- Super Low Light w/ True WDR (60 IPS) @ HD-SDI Mode
- True Day & Night w/ ICR Cut Filter
- 24 Smart LEDs, IR Distance 75 ft.
- 3-Axis Gimbal for Easy Wall Mount
- 12 VDC
- Video Output: < 8-G8 =(1080p)



HDSDI-BVIR1



**Hybrid
(HD-SDI/Analog)**


Technical Specifications

HDSDI-BVIR1	
CAMERA	
Image Sensor	1/3" 2.1 Megapixel CMOS Sensor
Total Pixels	2000 (H) x 1241 (V)
Effective Pixels	1984 (H) x 1225 (V)
Resolution	1080p Full HD
S/N Ratio	More than 50dB (AGC off)
Min. Illumination	Color : 0.1 Lux@F1.2 without DSS / 0.002 Lux@F1.2 with DSS B/W : 0.0008 Lux(@F1.2 with DSS) / 0.00 Lux@F1.2 (CDS On)
Frame	30fps Full HD
Video Output	HD-SDI Video Output
Lens	2.8~10mm Varifocal Lens
CAMERA FEATURE	
Day & Night	Auto/Day/B&W/EXT1/EXT2
ATW	1900 ~ 12000K
High Speed Shutter	Auto / Manual (1/30 ~ 1/100,000 Sec)
WDR	Off/ON (HD-SDI mode only)
True WDR	Off/ON
BLC	Off/ON (Size, Position)
HLC	Level Setting(0~20), Color
AGC	Level Setting(0~10)
D-Zoom	2.0 x 8.0x
White Balance	AUTO / AUTOext / PUSH / MANUAL
DNR	2D+3DNR, OFF/LOW/MIDDLE/HIGH
Motion Detection	Off/ON
Privacy Mask	18 Areas (On/Off, Color, Position)
Sens-Up	x2 ~x8
De-Fog	AUTO/Manual
Sharpness, Reverse (H,V)	0~10, Mirror, Flip

GENERAL	
Power Input	12V DC ± 10% (Max. 450mA)
Operation Temperature	-10°C ~ +50°C
Dimensions	83m (W) × 78mm (H) x 275mm (L)
Weight	1200g

Dimensions

Units: mm

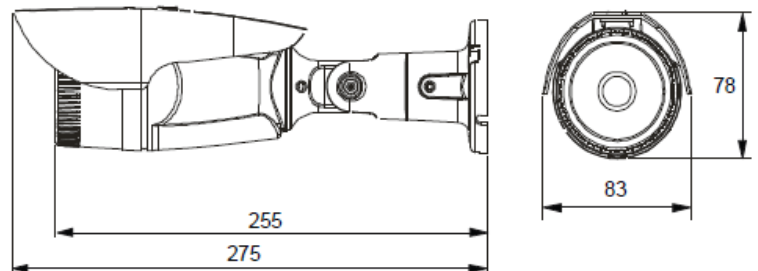

5S WDR Range
HD-SDI up to 400ft. over existing RG-59U or RG-6U.