




DESCRIPTION

The P3AC24-8-25 is a CCTV power center engineered to manage remote camera and accessory power requirements. The P3AC24-8-25 distribution module is designed with 8 individually fused outputs for powering up to 8 CCTV cameras and accessories.

It will provide 24 Volts AC via distribution to eight fused outputs with a total of 25 Amps continuous supply current. The P3AC24-8-25 power center is housed in the premium P3 lockable heavy gauge metal enclosure.

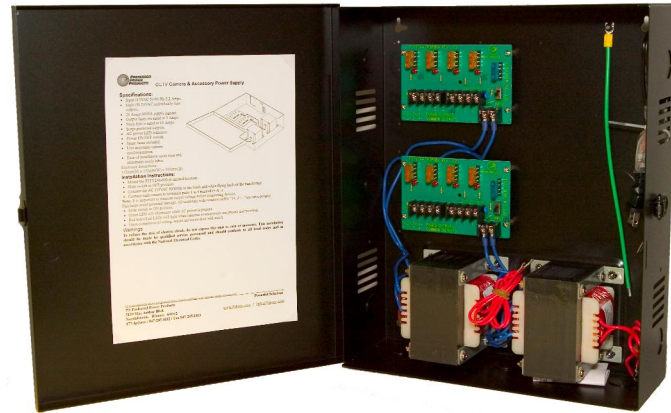

FEATURES

- Convenient screw terminal and fuse access.
- Power ON/OFF switch.
- AC power LED indicator.
- Individual LED's for each fused output.
- Lockable heavy gauge metal enclosure.
- Multiple knockouts to accommodate various wiring configurations.
- Double coated polyurethane finish.
- Uses easy to find automotive style fuses.
- Includes transformers and spare fuses.
- Available in 28VAC version.
- Available with optional circuit breaker, **P3AC24-8-25CB**.

SPECIFICATIONS

- Input 115VAC 50/60 HZ; 5.4 Amps.
- Eight 24VAC individually fused outputs.
- 25 Amps 600 VA supply currents at 70°F.
- Output fuses are rated at 5 Amps.
- Main fuse is rated at 25 Amps.
- Unit maintains camera synchronization.
- Transformer: (2) 110/24VAC, 300VA ea.
- Enclosure dimensions: 15.5" (H) x 13" (W) x 4.5" (D).