




DESCRIPTION

The P3DC15-8-4L is a UL listed CCTV power center engineered to manage remote camera and accessory power requirements. The P3DC15-8-4L distribution module is designed with 8 individually fused outputs for powering up to 8 CCTV cameras and accessories.


It will provide 6-15 VDC via distribution to eight fused outputs with a total of 4 Amps continuous supply current. The P3DC15-8-4L power center is housed in the premium P3 lockable heavy gauge metal enclosure.

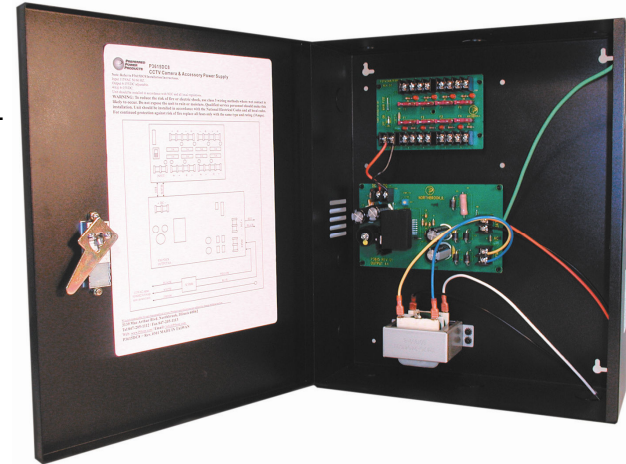

FEATURES

- Convenient screw terminal and fuse access.
- Power ON/OFF switch.
- AC power LED indicator.
- Individual LED's for each fused output.
- Lockable heavy gauge metal enclosure.
- Double coated polyurethane finish.
- Built-in battery charger
- Multiple knockouts to accommodate various wiring configurations.
- Uses easy to find automotive style fuses.
- 6 to 15 VDC field adjustable.
- Requires a transformer.
- Available with optional circuit breaker, **P3DC15-8-4LCB**

SPECIFICATIONS

- Input 115VAC 50/60 HZ; 1.0 Amps.
- Eight 6 to 15VDC individually fused outputs.
- Output fuses are rated at 1 Amps.
- Main fuse is rated at 3 Amps.
- UL listed  us
- 4 Amps 100VA supply currents at 70°F.
- Transformer: 110/24VAC, 100VA
- Enclosure Dimensions: 15.5" (H) x 13" (W) x 4.5" (D).