




DESCRIPTION

The P3DCSEL-16-5 is a CCTV power center engineered to manage remote camera and accessory power requirements. The P3DCSEL-16-5 distribution module is designed with 16 individually fused outputs for powering up to 16 CCTV cameras and accessories.

It will provide 12VDC or 24VDC via distribution to sixteen fused outputs with a total of 5 Amps continuous supply current. The P3DCSEL-16-5 power center is housed in the premium P3 lockable heavy gauge metal enclosure.

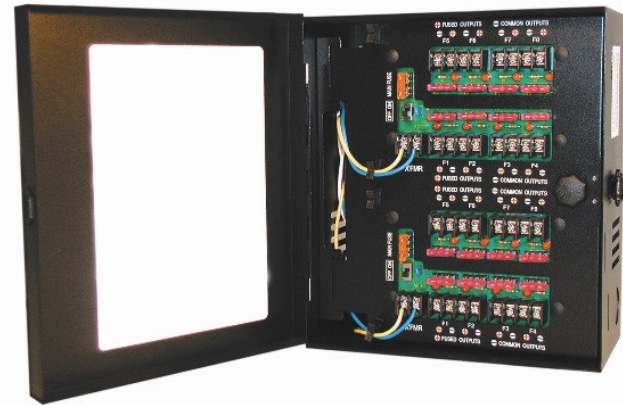

FEATURES

- Convenient screw terminal and fuse access.
- Separation panel between transformers and output access.
- Power ON/OFF switch.
- AC power LED indicator.
- Individual LED's for each fused output.
- Lockable heavy gauge metal enclosure.
- Double coated polyurethane finish.
- Multiple knockouts to accommodate various wiring configurations.
- Uses easy to find automotive style fuses.
- 12 or 24 VDC selectable.
- Available with optional circuit breaker, **P3DCSEL-16-5CB**.

SPECIFICATIONS

- Input 115VAC 50/60 HZ; 1.5 Amps.
- Sixteen 12VDC or 24VDC individually fused outputs.
- 5 Amps 175VA supply currents at 70°F.
- Output fuses are rated at 1 Amp.
- Main fuse is rated at 3 Amps.
- Transformer: 110/28VAC, 175VA.
- Enclosure Dimensions: 10" (H) x 9" (W) x 4.5" (D).