




DESCRIPTION

The P3DCAC-8-5 is a CCTV power center engineered to manage remote camera and accessory power requirements. The P3DCAC-8-5 distribution module is designed with 16 individually fused outputs for powering up to 16 CCTV cameras and accessories.

It will provide 24VAC via distribution to eight fused outputs with a total of 4 Amps continuous supply current. In addition, it will provide 12 VDC via distribution to 8 fused outputs with a total of 5 Amps continuous supply current. The P3DCAC-8-5 power center is housed in the premium P3 lockable heavy gauge metal enclosure.

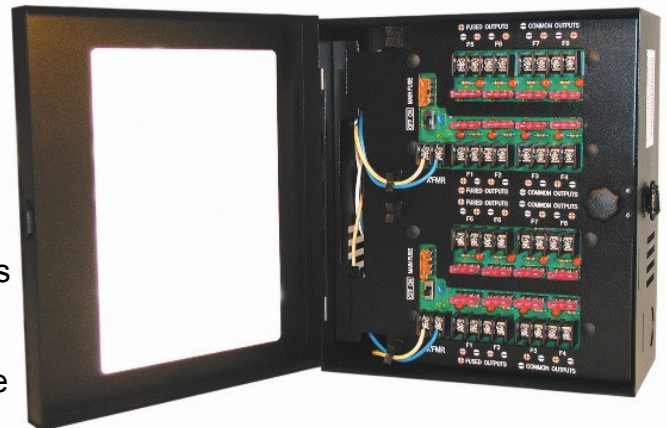

FEATURES

- Convenient screw terminal and fuse access.
- Separation panel between transformers and output access.
- Power ON/OFF switch.
- AC power LED indicator.
- Individual LED's for each fused output.
- Lockable heavy gauge metal enclosure.
- Double coated polyurethane finish.
- Multiple knockouts to accommodate various wiring configurations.
- Uses easy to find automotive style fuses.
- Available with optional circuit breaker, **P3DCAC-8-5CB**.

SPECIFICATIONS

- Input 115VAC 50/60 HZ; 1.8 Amps.
- Eight 24VAC and eight 24VDC individually fused outputs.
- 8 output 12 VDC, 3AMP.
- 8 output 24 VAC, 4AMP.
- Output fuses are rated at 3 Amps.
- Main fuse is rated at 5 Amps.
- AC portion maintains camera synchronization.
- Transformer: (1) 110/28VAC, 175VA; (1) 110/24VAC, 100VA.
- Enclosure Dimensions: 10" (H) x 9" (W) x 4.5" (D).